Thank You for purchasing Luxe Liners

Please read through all directions before you begin installation.



Material needed for installation:

Included:

1 x Luxe Liner Instructions

4 x 45 inch sections of 2 inch Velcro

Other Items Needed:

Paper towels Isopropyl Alcohol Scissors

Power Drill (optional)



SCAN QR Code for install video

Install Bunk Liner

Set up your Bunk end as normal


Step 1: Lay the bunk liner on your bed.

Step 2: Pull the liner over the Shepherd hook, align the center mark as shown.

Step 3: Work the back window material around the bed bow.

Step 4: Connect and adjust the straps around the bed bow. Adjust straps so the rear window zipper

of the liner and canvas line up.

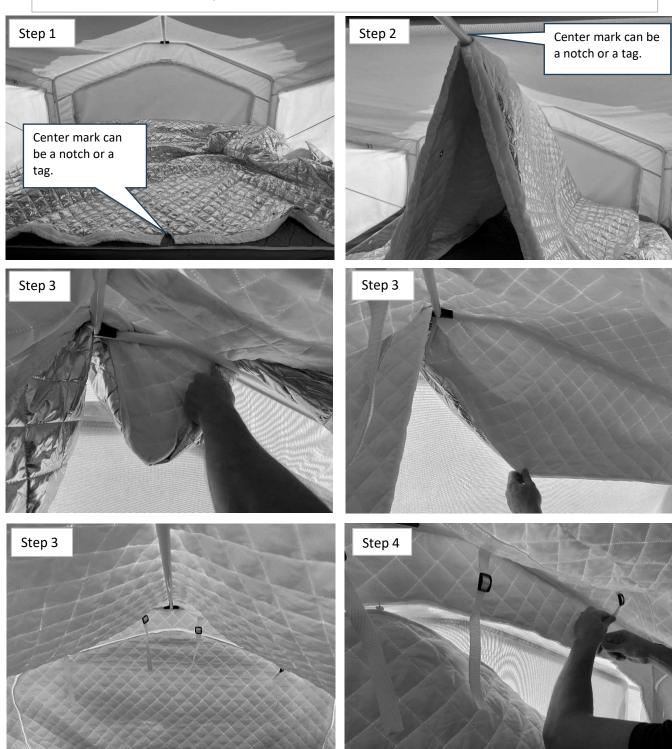


Trim Velcro

Attach the provided Velcro to the Luxe Liners, do NOT remove the backing. Use one strip on each side and 2 strips on the top.


Using your liners as a guide, trim any excess Velcro with scissors.



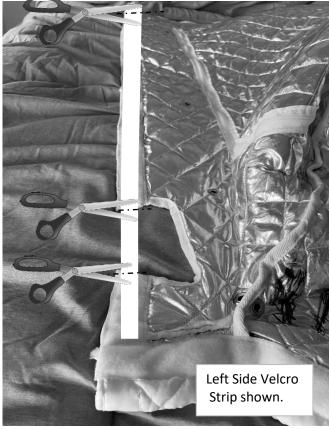


Mark Velcro Location: With the straps now attached, grab the Liner by the Velcro, starting in the middle and working out to the corner, Pull the liner tight and mark the location for the top strips of velcro under the cabinet or on the wall next to were the canvas attches.


NOTE: For ROO/SHAMROCKS 2006 to 2011 only: Velcro will need to attach to the metal frame surrounding your bunk opening. Scuff and clean the frame and stick Velcro along the top and sides.

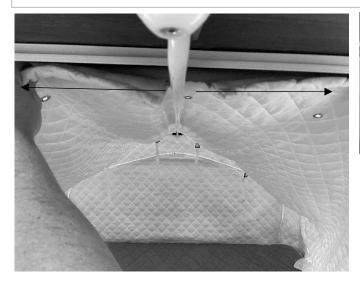



NOTE: Some trailer models will require relocating curtain rails and other hardware. Curtain rails usually move about 2 inches, this will not affect the function of your curtains. Remove the curtain rail, install your liners, then reinstall the the curtain next to the liners. Gear net pad eyes will also require relocation or replacement in a new location.



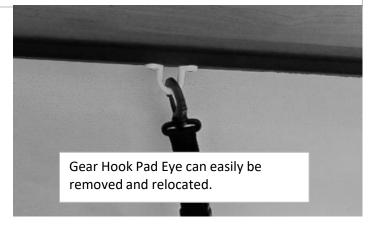


Attach Top Velcro

Clean the area you will apply the Velcro to with Isopropyl Alcohol. Let Dry completely. Install Velcro in the location you marked in the previous step. Press firmly and work out any air bubbles.










Attach the side Velcro.


Clean the area with alcohol as you did the top section and install the Velcro as shown in Figure 10 and 11 Press firmly and work out any air bubbles.

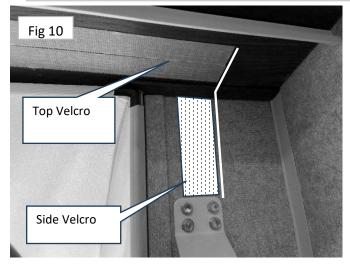




Attach the side Velcro. Alternative location for unique trailers


- Step 1. Attach the liner to the top velcro section, start from the center and work your way out to the ends.
- Step 2. Place the side panel into positon, (do not add tension) And mark the side velcro location.
- Step 3. Clean the area with alcohol as you did the top section and install the Velcro in your marked location. Press firmly and work out any air bubbles.

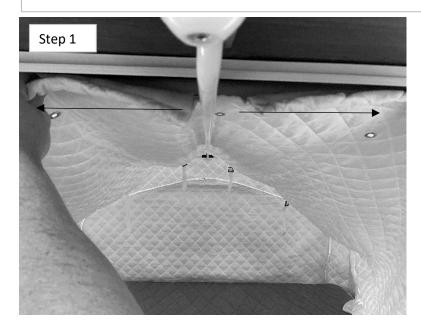




Attach Liner

- Step 1. Attach the top section first, start from the center and work your way out to the ends.
- Step 2. Then attach the sides lining up the notch with the bed cable. Side should hang loose. No need to pull them tight.
- Step 3. Adjust the back panel so it is centered.
- Step 4. Adjust straps at bed bow to remove sag and align the rear window.

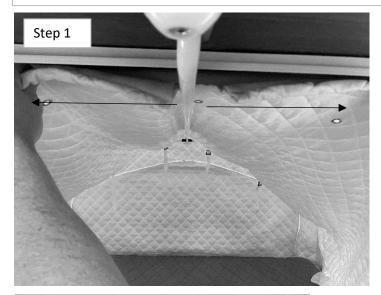





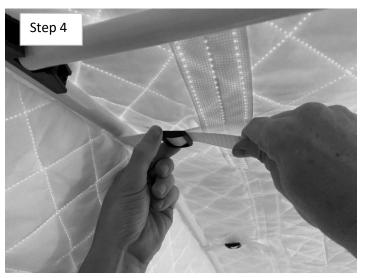



Packing Up:

You can leave your Luxe Liners installed when packing up. Remove your shepard hook as normal. You will need to pull the bunk liner on top of the bed bow as shown below. Make sure bed bow rests flush on the mattress or bunk door depending on your model. For jayco owners make sure no material is closed up in the hinge. Note: We recommend you **DO NOT** store your camper for long periods of time with your Luxe liners installed. Protect your investment- remove your liners and store them in a cool dry place when camper is unused for extended periods.





Care instructions:

Your bunk liners are completely machine washable. Use a large front loading washer on gentle cold. Use mild detergent like Downy. Dry on lowest heat setting.

Note on Condensation and moisture:

Luxe Liners will significantly reduce condensation in your bunk ends. However, in extreme conditions, a small amount of moisture can accumulate between the liner and the canvas. This is normal, the moisture will dissipate naturally during the day with normal activity, and opening your tent windows will help. Before storing your trailer, check to make sure there is no moisture.

Always use good condensation management techniques. Run exhaust fans when cooking or showering. Run Exhaust and vent fans in humid conditions. Run your air conditioning fan to increase air circulation.



